


Connectors & cables

C2 Micro style

3 Wire straight

Wire type		3 Wire straight	3 Wire straight
Catalog number		C2-3WS-V2	C2-3WS-V6
List price		\$ 19.80	\$ 29.10
Cable length	meters	2	6
Number of conductors		3	3
Conductor colors		1 - Green 2 - Red/Black 3 - Red/White	1 - Green 2 - Red/Black 3 - Red/White
Wire size		22 AWG	22 AWG
Coupling nut		Nickel-plated brass	Nickel-plated brass
Connector		Thermoplastic PUR	Thermoplastic PUR
Contacts		Gold-plated brass	Gold-plated brass
Cable		Oil resistant gray PVC jacket 300V, 105C UL recognized CSA certified	Oil resistant gray PVC jacket 300V, 105C UL recognized CSA certified
Conductors		High flex stranding, PVC insulation	High flex stranding, PVC insulation
Temperature	°F	-13 ... +221	-13 ... +221
Protection	IEC	IP67	IP67
LED output indication		—	—




1 = Green
2 = Red/Black
3 = Red/White

Female End View

Approximate dimensions

C2-3WS-V2
C2-3WS-V6

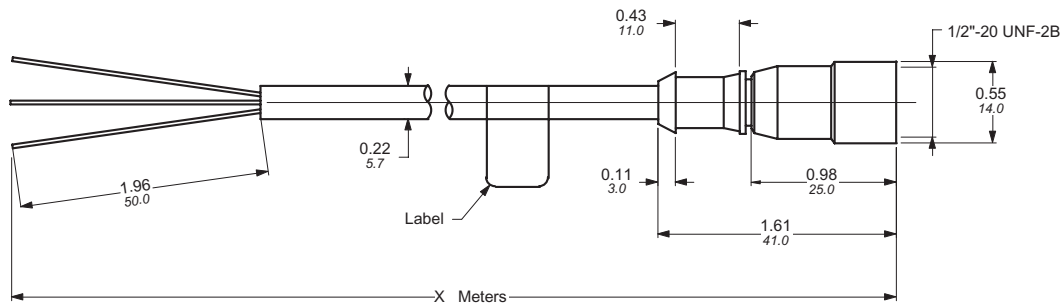


Connectors & cables

C2 Micro 1/2" – 20 style

3 Wire 90°



Wire type		3 Wire 90°	3 Wire 90°
Catalog number		C2-3W9-V2	C2-3W9-V6
List price		\$ 19.80	\$ 29.10
Cable length	meters	2	6
Number of conductors		3	3
Conductor colors		1 - Green 2 - Red/Black 3 - Red/White	1 - Green 2 - Red/Black 3 - Red/White
Wire size		22 AWG	22 AWG
Coupling nut		Nickel-plated brass	Nickel-plated brass
Connector		Thermoplastic PUR	Thermoplastic PUR
Contacts		Gold-plated brass	Gold-plated brass
Cable		Oil resistant gray PVC jacket 300V, 105C UL recognized CSA certified	Oil resistant gray PVC jacket 300V, 105C UL recognized CSA certified
Conductors		High flex stranding, PVC insulation	High flex stranding, PVC insulation
Temperature	°F	-13 ... +221	-13 ... +221
Protection	IEC	IP67	IP67
LED output indication		—	—

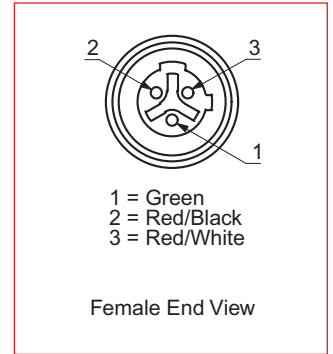

Approximate dimensions

C2-3W9-V2
C2-3W9-V6

