


Connectors & cables

C8 Nano style

3 Wire straight

Wire type		3 Wire straight	3 Wire straight
Catalog number		C8-3WS-V2	C8-3WS-V6
List price		\$ 13.50	\$ 22.70
Cable length	meters	2	6
Number of conductors		3	3
Conductor colors		1 - Brown 2 - Black 3 - Blue	1 - Brown 2 - Black 3 - Blue
Wire size		24 AWG	24 AWG
Coupling nut		Nickel-plated brass	Nickel-plated brass
Connector		Thermoplastic PUR	Thermoplastic PUR
Contacts		Gold-plated brass	Gold-plated brass
Cable		Oil resistant gray PVC jacket 300V, 105C	Oil resistant gray PVC jacket 300V, 105C
Conductors		High flex stranding, PVC insulation	High flex stranding, PVC insulation
Temperature	°F	-40 ... +194	-40 ... +194
Protection	IEC	IP67	IP67
LED output indication		—	—




1 = Brown
2 = Black
3 = Blue

Female End View

10

Approximate dimensions


C8-3WS-V2
C8-3WS-V6

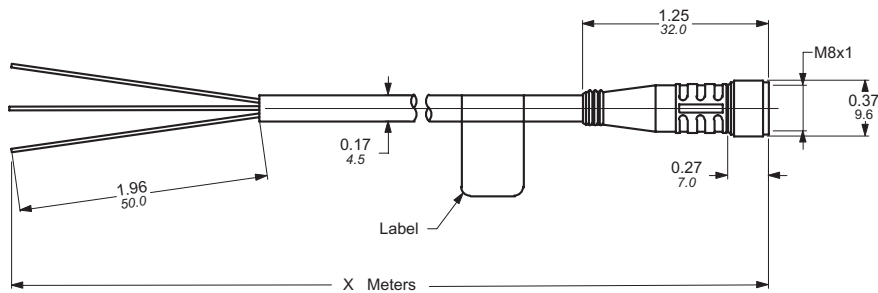


Connectors & cables

C8 Nano style

3 Wire 90°




Wire type		3 Wire 90°	3 Wire 90°
Catalog number		C8-3W9-V2	C8-3W9-V6
List price		\$ 13.50	\$ 22.70
Cable length	meters	2	6
Number of conductors		3	3
Conductor colors		1 - Brown 2 - Black 3 - Blue	1 - Brown 2 - Black 3 - Blue
Wire size		24 AWG	24 AWG
Coupling nut		Nickel-plated brass	Nickel-plated brass
Connector		Thermoplastic PUR	Thermoplastic PUR
Contacts		Gold-plated brass	Gold-plated brass
Cable		Oil resistant gray PVC jacket 300V, 105C	Oil resistant gray PVC jacket 300V, 105C
Conductors		High flex stranding, PVC insulation	High flex stranding, PVC insulation
Temperature	°F	-40 ... +194	-40 ... +194
Protection	IEC	IP67	IP67
LED output indication		—	—

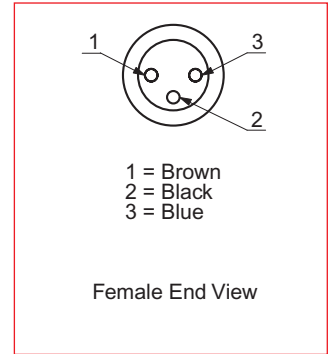

Approximate dimensions

C8-3W9-V2
C8-3W9-V6

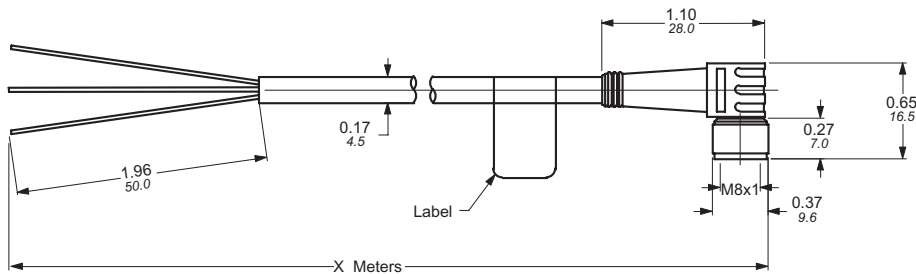


Connectors & cables

C8 Nano style

3 Wire 90° PNP, NPN

Wire type		3 Wire 90° PNP	3 Wire 90° NPN
Catalog number		C8-3W9LP-V2	C8-3W9LN-V2
List price		\$ 28.20	\$ 28.20
Cable length	meters	2	2
Number of conductors		3	3
Conductor colors		1 - Brown 2 - Black 3 - Blue	1 - Brown 2 - Black 3 - Blue
Wire size		24 AWG	24 AWG
Coupling nut		Nickel-plated brass	Nickel-plated brass
Connector		Thermoplastic PUR	Thermoplastic PUR
Contacts		Gold-plated brass	Gold-plated brass
Cable		Oil resistant gray PVC jacket 300V, 105C	Oil resistant gray PVC jacket 300V, 105C
Conductors		High flex stranding, PVC insulation	High flex stranding, PVC insulation
Temperature	°F	-40 ... +194	-40 ... +194
Protection	IEC	IP68	IP68
LED output indication		PNP	NPN




1 = Brown
2 = Black
3 = Blue

Female End View

10

Approximate dimensions

C8-3W9LP-V2

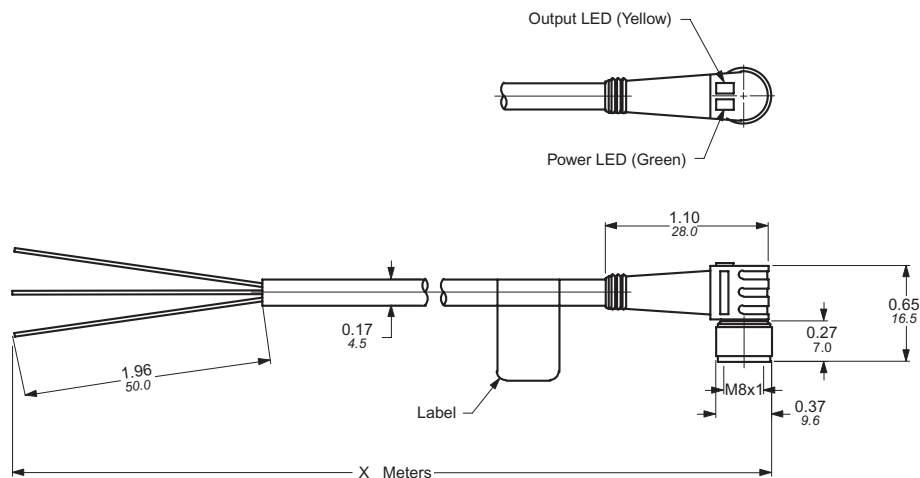

C8-3W9LN-V2

