

Components for quick mounting onto DIN rails (35mm)

Mounting depth: 68mm
Mounting width: 1, 2, 3 and 4 pole switches = 17.5mm (= 1 module)

E220 Switches, 16 & 25A

Switching capacity: $1.25 I_n$, $1.1 U_n$, $\cos \phi = 0.6$
Short-circuit withstanding capacity: 3 kA, 380V, $\cos \phi = 0.9$
Toggle sealable: In ON and OFF positions
Connection cross-sections: Up to $1 \times 6\text{mm}^2$ or $2 \times 2.5\text{mm}^2$
Rated AC voltage: 240 VAC UL/CSA (E171252)
250/440 VAC IEC


E240/270 Disconnect switches, 45, 63, 80, & 100A

Switching capacity: $1.25 I_n$, $1.1 U_n$, $\cos \phi = 0.3$
Short-circuit withstanding capacity: E240 = 10kA, E270 = 25kA RMS
Connection cross-sections: E240 up to 25mm^2
E270 up to 50mm^2
Rated AC voltage: 240/400/415 VAC


E Series components for quick mounting onto DIN rails (35mm)

Mounting depth: 68mm
Mounting width: 17.5mm (=1 module)
Color: RAL 7035, grey
Connection cross sections: Up to $1 \times 6\text{mm}^2$ or $2 \times 2.5\text{mm}^2$
Rated current: 16A
Rated voltage: 250 VAC IEC
Rated voltage: 240 VAC UL/CSA (E171252)

Terminal markings

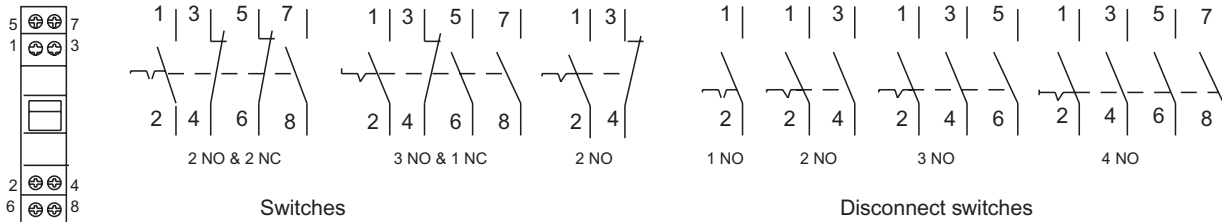

14

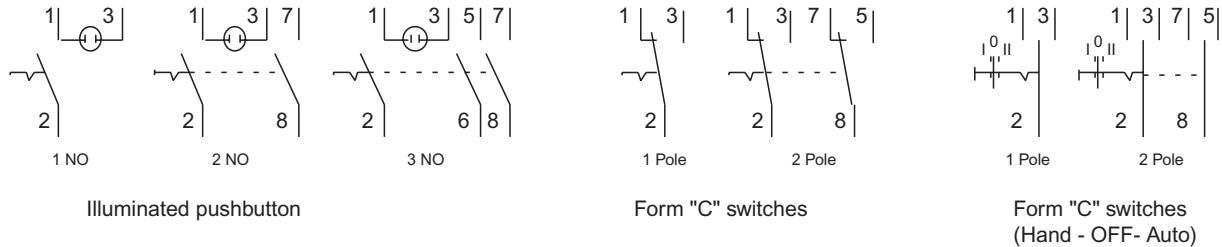

Terminal assignments for pushbuttons and indicator lights

