

ProgramaCube® KRPS Series Single Function Time Delay Relay (10A SPDT)



US Patent 6708135



7

- Choose 1 of 14 Standard Functions
- Factory Programmed
- Microcontroller Circuitry, +/-0.5% Repeat Accuracy
- Isolated 10 A SPDT Output Contacts
- Universal Voltage 24...240 VAC/DC
- Delays from 100 ms...1000 h in 9 Ranges
- Onboard, External Adjust or Fixed Time Delay

Complete Product Details:
<http://www.ssac.com/pp1.htm>



Accessories



100K Ohm External adjust potentiometer
P/Ns:
P1004-95 (fig A)
P1004-95-X (fig B)



Versa-knob
P/N: P0700-7



DIN rail adaptor
P/N: P1023-20


See accessory pages



Choose from 1 of 14 standard single functions, fixed or onboard or external adjustment, and 9 time ranges. All available through the QuickShip program.

The KRPS Series is a factory programmed time delay relay available in any 1 of 14 functions and measures only 2 inches square. Modules are manufactured without the function assigned. When an order is received, the function and time delay software are added. This approach provides fast QuickShip delivery on all time ranges and functions. Encapsulation protects against shock, vibration, and humidity. The KRPS Series is a cost effective approach for OEM applications that require small size, isolation, accuracy, and long life.

Connection

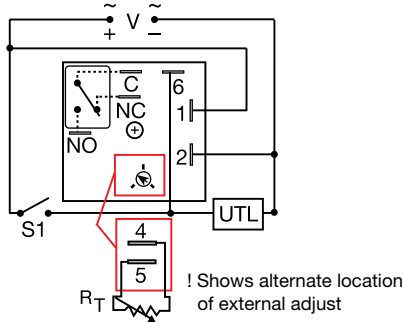

V = Voltage C = Common, Transfer Contact
NC = Normally Closed NO = Normally Open
S1 = Initiate Switch UTL = Untimed Load

A knob is supplied for adjustable units, or RT terminals 4 & 5 for external adjust. Select a 100K ohm potentiometer for full time range adjustment. The untimed load is optional. S1 is not used for some functions. Dashed lines are internal connections.

**Function Chart

Delay On Make	M
Delay On Break	B
Recycle (ON Time First, Equal Times)	RE
Recycle OFF Time First, Equal Times)	RD
Single Shot	S, SD
Interval	I
Trailing Edge Single Shot	TS
Inverted Single Shot	US
Inverted Delay On Break	UB
Accumulative Delay on Make	AM
Motion Detector / Retriggerable Single Shot	PSD, PSE
Alternating Relay	FT
Flip Flop (leading edge)	F

See page 9 for function time diagrams

Technical Data

Output Rating (at 40°C)	10 A resistive at 125 V AC 5 A resistive at 230 V AC & 28 V DC 1/4 hp at 125 V AC
Mechanical Mounting Package Termination	Surface mt. with one #10 (M5 x 0.8) screw 2 x 2 x 1.21 in. (50.8 x 50.8 x 30.7 mm) 0.25 in. (6.35 mm) male quick connects

Ordering Table

KRPS Series	X Input A - 24 ... 240 V AC/DC D - 12 ... 48 V DC†	X Adjustment 1 - Fixed 2 - Onboard Adjustment 3 - External Adjustment	X Time Delay* 1 - 0.1 ... 10 s 2 - 1 ... 100 s 3 - 10 ... 1000 s 4 - 0.1 ... 10 m 5 - 1 ... 100 m 6 - 10 ... 1000 m 7 - 0.1 ... 10 h 8 - 1 ... 100 h 9 - 10 ... 1000 h	X Function** Specify Function (Refer to Function Chart for Code)
--------------------	--	--	---	---

*Note: Grayed option is available in standard lead time.

* If Fixed Delay is selected, insert delay [0.1 ... 1000] followed by (S) secs., (M) mins., or (H) hrs.

Example P/N:

KRPSA23RE = Universal AC/DC voltage, onboard adjustment, 10...1000 sec., recycling, ON time first
KRPSA10.5SI = Universal AC/DC voltage, fixed delay of 0.5 sec., interval function